

HALO SMD



- REFLEKTOR LED SMD
- těleso svítidla: lakovaný hliník
- difuzor: tvrzené sklo
- vysoká světelná účinnost
- prachotěsný a voděodolný
- kompaktní design

220-240V~
50/60Hz



IP₆₅

IK₀₇



-20+40°C



120°




25 000

Pf (λ)
≥0,9




NEUTRAL
WHITE

COOL
WHITE

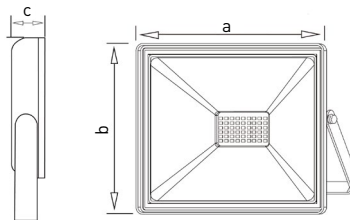


- LED 10W ▶ ⇒ 75 W HALOGEN F - class
- LED 20W ▶ ⇒ 140 W HALOGEN F - class
- LED 30W ▶ ⇒ 200 W HALOGEN F - class
- LED 50W ▶ ⇒ 320 W HALOGEN F - class


HALO SMD 10W




HALO SMD 20W



HALO SMD 30W



HALO SMD 50W



							T_c CCT	R_a CRI	$\leftarrow a \rightarrow$ [mm]	$\leftarrow b \rightarrow$ [mm]	$\leftarrow c \rightarrow$ [mm]			DKC
HALO SMD 10W NW	GCLR006	8592660129136	10	950	neutrální bílá	4000K	≥80	110	90	25	0,21	1/24	143 Kč	
HALO SMD 10W CW	GCLR010	8592660125664	10	950	studená bílá	6000K	≥80	110	90	25	0,21	1/24	143 Kč	
HALO SMD 20W NW	GCLR007	8592660129143	20	1900	neutrální bílá	4000K	≥80	140	120	25	0,32	1/24	213 Kč	
HALO SMD 20W CW	GCLR011	8592660125671	20	1900	studená bílá	6000K	≥80	140	120	25	0,32	1/24	213 Kč	
HALO SMD 30W NW	GCLR008	8592660129150	30	2700	neutrální bílá	4000K	≥80	170	150	28	0,55	1/20	334 Kč	
HALO SMD 30W CW	GCLR012	8592660125688	30	2700	studená bílá	6000K	≥80	170	150	28	0,55	1/20	334 Kč	
HALO SMD 50W NW	GCLR009	8592660129167	50	4250	neutrální bílá	4000K	≥80	210	180	30	0,82	1/20	488 Kč	
HALO SMD 50W CW	GCLR013	8592660125695	50	4250	studená bílá	6000K	≥80	210	180	30	0,82	1/20	488 Kč	